


# MULTI VISIO

- Trevira CS fabric with stable structure
- Particularly suited to digital printing
- Standard 100 by Oeko-Tex® certified, free from harmful substances

## APPLICATIONS

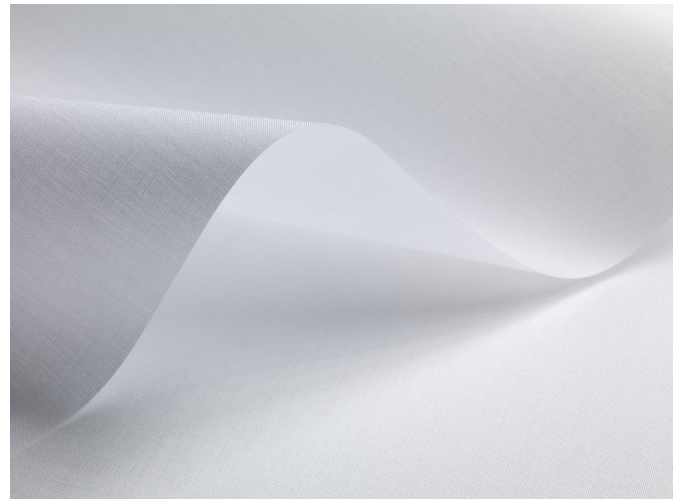

## FABRIC PROPERTIES

	Semi transparent
	Polyester Trevira CS
	210 g/m <sup>2</sup>
	0.40 mm
	235 cm
	8.9 cm, 12.7 cm, 240 cm

## FEATURES / TECHNICAL PROPERTIES

	6-7
	Alpha-w = 0.30
	Flame retardant
	Applicable in humid areas
	Digital printing
	Oeko-Tex
	Laser cutting
	Special colours from 500 m

## WASHING INSTRUCTIONS



## FIRE PROTECTION

B-s1,d0 (EN 13501-1)  
 B1 (DIN 4102-1)  
 M1 (NF P 92-503/5/7)  
 Type B (BS 5867-2)  
 NFPA 701



**Multi Visio**
**OPTICAL AND SOLAR COEFFICIENTS ( $\pm 5\%$ , DIN EN 410)**

Colour	$T_V$	$T_S$	$R_S$	$A_S$	$T_{UV}$	$F_C$	$g_{tot}$
<b>01</b>	42.0	41.0	50.0	9.0	32.0	0.63	0.46
<b>02</b>	31.0	35.0	48.0	17.0	23.0	0.64	0.46
<b>03</b>	38.0	38.0	49.0	13.0	25.0	0.64	0.46
<b>08</b>	7.0	28.0	32.0	40.0	7.0	0.74	0.53
<b>20</b>	36.0	39.0	48.0	13.0	22.0	0.65	0.46
<b>21</b>	6.0	25.0	32.0	43.0	6.0	0.74	0.52
<b>26</b>	27.0	35.0	43.0	22.0	15.0	0.68	0.47
<b>27</b>	17.0	31.0	38.0	31.0	10.0	0.71	0.50
<b>51</b>	42.0	40.0	49.0	11.0	31.0	0.64	0.46

$T_V$  Visible light transmission

$R_S$  Solar reflectance

$T_{UV}$  UV transmission

$g_{tot}$  Total g-value

$T_S$  Solar transmission

$A_S$  Solar absorption

$F_C$  Shading factor

$F_C + g_{tot}$ : Value calculated with glass:  $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$ , DIN EN 13363-1

**Multi Visio**


Colours shown are not binding