


PUMA

- Robust blackout fabric with reliable hanging characteristics
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Greenguard® certification for low-emission products

APPLICATIONS



Not suitable: SG 4905,
SG 4900, SG 4907

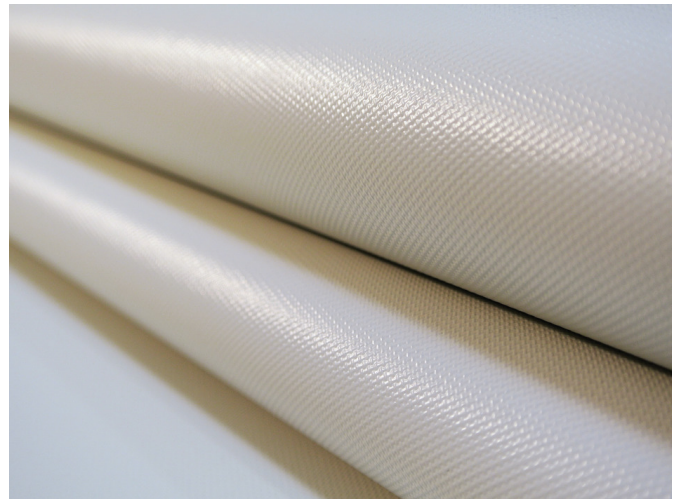

FABRIC PROPERTIES

● Blackout

⌘ 25% glass fibre, 75% PVC coated

Ⓢ 407 / 530 g/m²

⊥ 0.30 / 0.38 mm

← max. → 239 / 295 cm

📏 244 cm, 300 cm

FEATURES / TECHNICAL PROPERTIES

☀ 6

🔥 Flame retardant

💧 Applicable in humid areas

🖨 Digital printing

🌿 Oeko-Tex, Greenguard

🎨 Special colours from 1'500 m

ℹ Weldable

WASHING INSTRUCTIONS



FIRE PROTECTION

Class 1 (CSE RF)
M1 (NF P 92-503/5/7)
Type B (BS 5867-2)



Puma
OPTICAL AND SOLAR COEFFICIENTS ($\pm 5\%$, DIN EN 410)

Colour	R_s	A_s	F_c	g_{tot}
900	56.0	44.0	0.56	0.40
909	22.0	78.0	0.78	0.56
930	5.0	95.0	0.89	0.64
933	45.0	55.0	0.63	0.45
934	60.0	40.0	0.54	0.39

 R_s Solar reflectance

 A_s Solar absorption

 F_c Shading factor

 g_{tot} Total g-value

 $F_c + g_{tot}$: Value calculated with glass: $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1


Colours shown are not binding