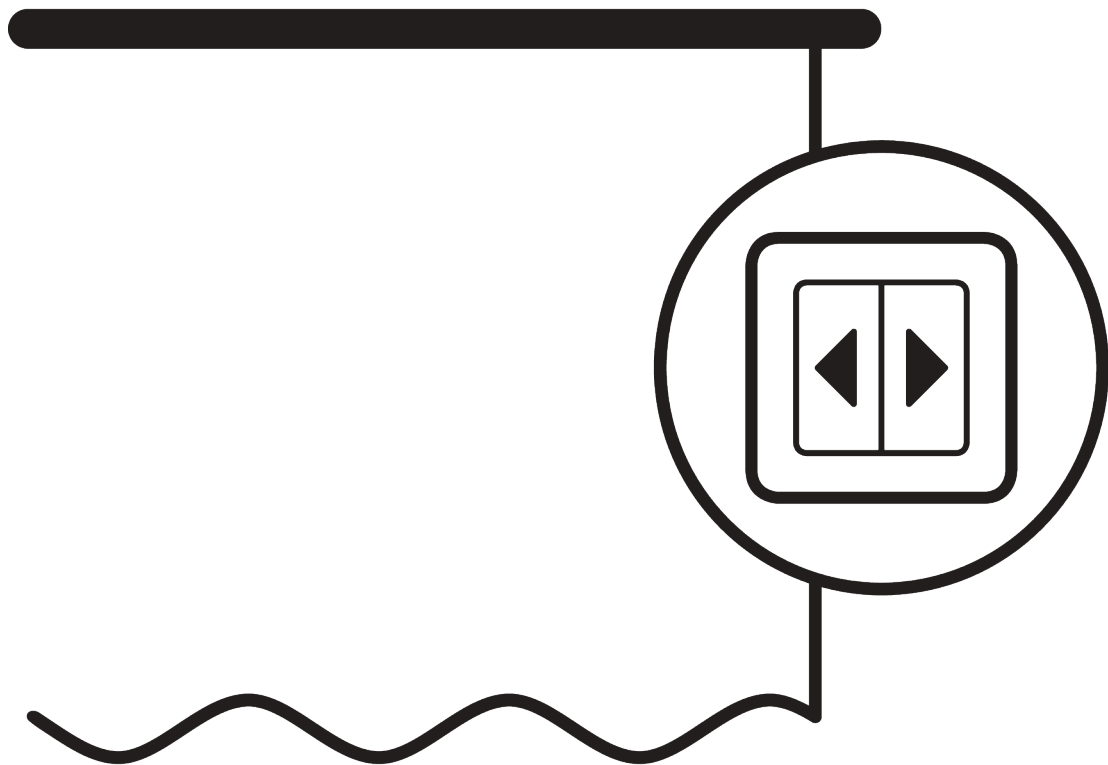


# ELECTRIC CURTAIN TRACK SYSTEMS



# GENERAL NOTES

## **Dimensions**

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on curtain make-up and fabric thickness.
- Distance between gliders max. 80 mm / distance between rollers max. 100 mm.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.
- Full functionality may be affected if the curtain touches the profile.

## **Fitting**

- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!

## **Child Safety**

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.

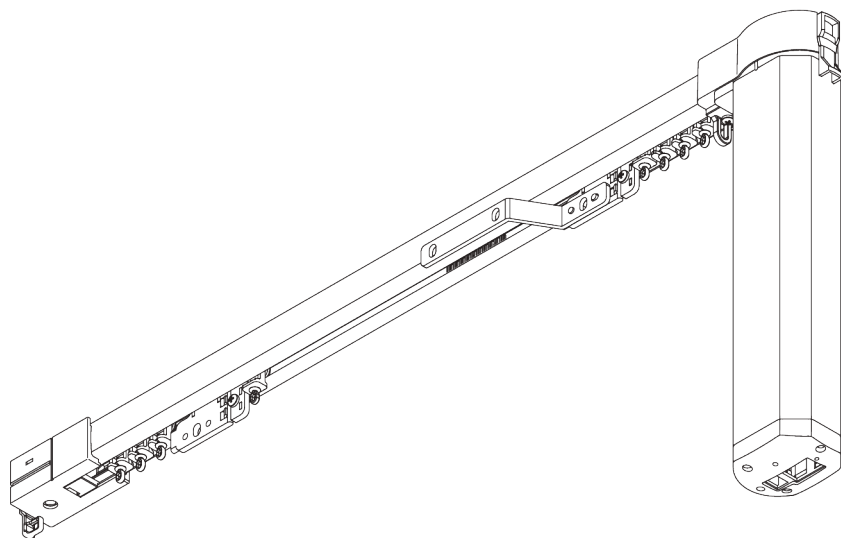

# APPLICATION CHART

| <u>PAGE</u> | <u>SYSTEM</u>  | <u>OPERATION</u>                                                                  | <u>DIMENSION</u> | <u>DESIGN</u>                                                                     | <u>WAVE</u>                                                                         | ← max. → | kg <sub>max.</sub> |
|-------------|----------------|-----------------------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|--------------------|
| 5           | <b>SG 5100</b> |  | S - M            |  |  | 6 m      | 25 kg              |
| 15          | <b>SG 5600</b> |  | S - L            |  |  | 25 m     | 65 kg              |
| 29          | <b>SG 5800</b> |  | L                |  |                                                                                     | 60 m     | 270 kg             |



# SG 5100

---



## PRODUCT INFORMATION

- **Operation:** motorised
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016
- **Fabrics:** refer to Silent Gliss fabric collection

### **Features:**

- Wave
- Various control options
- Touch & Go
- Manual override
- Different motor versions
- Bendable

# SYSTEM SPECIFICATIONS

A. SYSTEM  
DIMENSIONS



6 m



25 kg

Max. curtain weights  
with rollers


|           | 3 m | 6 m |
|-----------|-----|-----|
|           | 20  | 25  |
|           | 20  | 25  |
|           | 20  | 17  |
|           | 20  | 17  |
|           | 15  | 13  |
|           | 15  | 13  |
|           | 12  | 10  |
|           | 12  | 10  |
| (kg max.) |     |     |

Max. curtain weights  
with Wave gliders

|           | 3 m | 6 m |
|-----------|-----|-----|
|           | 20  | 20  |
|           | 20  | 20  |
|           | 18  | 14  |
|           | 18  | 14  |
|           | 12  | 10  |
|           | 12  | 10  |
|           | 10  | 9   |
|           | 10  | 9   |
| (kg max.) |     |     |

## B. PROFILE

### Profile and bending information




**SG 10925**

Profile


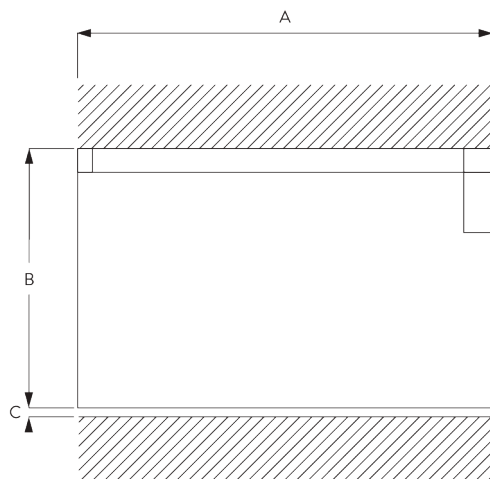
## C. HOW TO MEASURE



A: System width

B: System height

C: Distance between floor and fabric

## D. SPECIFICATION

### TEXT

#### EN

*Silent Gliss SG 5100 Electrically Operated Curtain Track. Comprises aluminium profile SG 10925 in white complete and assembled with motor SG 5190, internal drive belt SG 10825, gliders SG 10931 at 10/m. Ceiling fix with SG 10926 clamps/ face fix with Smart Fix at maximum 500 mm centres. Operation via wireless wall switch SG 10946-49 or via low voltage contacts. Silent Gliss Wave option is available.*

#### SV

*Silent Gliss SG 5100 eldragssystem. Består av aluminiumprofil SG 10925 i specificerad längd i vitlack eller angiven RAL färg med motor SG 5190 monterad. 10 st SG 10931 glid per meter. Takmonteras med fäste SG 10926 c/c 500 mm. Vägghmontering med SG Smart Fix c/c 500 mm. Styrning med trådlös väggsändare SG 10946-49 eller med lågvoltkontakt. Kan användas med system Wave.*

#### NO

*Silent Gliss SG 5100 Elektrisk gardinskinne. Består av aluminiumprofil SG 10925 i spesifisert lengde, standard i hvitlakkert eller spesifisert RAL farge. Motor SG 5190. 10 stk SG 10931 glide pr meter. Takmonteres med feste SG 10926 c/c 500 mm. Veggmontering med SG Smart Fix c/c 500 mm. Styring med trådløs veggssender SG 10946-49 eller med lavvolt kontakt. Kan kombineres med Wave system.*

#### DA


*Silent Gliss SG 5100 elektrisk gardinskinnesystem. Består af aluminiumprofil SG 10925 i hvidt, fuldstændig samlet med motor SG 5190, drivrem SG 10825, 10 stk. glide SG 10931 pr. m. Loftmonteres med klemmer SG 10926 clamps/ væghmonteres med Smart Fix med en afstand på højst 500 mm. Styres med en trådløs væghkontakt SG 10946-49 eller lavspændingskontakter. Kan bruges med Silent Gliss Wave.*

# FITTING

## A. FITTING INFORMATION



### Fixing points

For detailed fitting information, visit the Silent Gliss website.



## B. CEILING FITTING
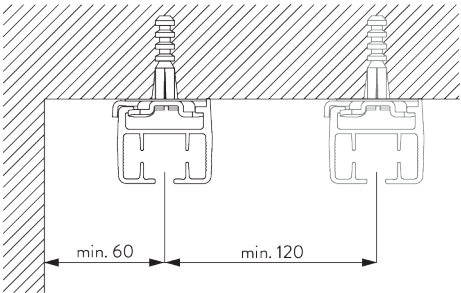
### Clamp SG 10926




**SG 10926**


Clamp

## C. WALL FITTING

### Smart Fix




**Smart Fix SG 11201 - SG 11205 and clamp SG 10926:**  
Screw SG 11127 (M4x10) needed.



**Square Smart Fix SG 11211 - SG 11215 and clamp SG 10926:**  
Screw SG 11127 (M4x10) needed.


| Smart Fix           | X mm    |
|---------------------|---------|
| SG 11201 / SG 11211 | 72      |
| SG 11202 / SG 11212 | 92      |
| SG 11203 / SG 11213 | 112     |
| SG 11204 / SG 11214 | 142     |
| SG 11205 / SG 11215 | 192     |
| SG 11154            | 102-130 |
| SG 11155            | 132-160 |
| SG 11156            | 182-210 |



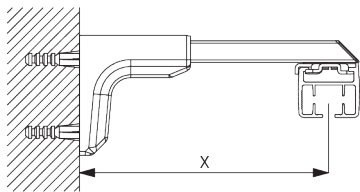

**Universal Smart Fix SG 11154 - SG 11156 and clamp  
SG 10926:**

Screw SG 11158 (M4x12) needed.



**SG 10926**

Clamp




**SG 11127**

Countersunk head screw  
M4x10




**SG 11158**

Countersunk head screw  
M4x12




**SG 11201**

Smart Fix 80 mm




**SG 11202**

Smart Fix 100 mm




**SG 11203**

Smart Fix 120 mm




**SG 11204**

Smart Fix 150 mm




**SG 11205**

Smart Fix 200 mm




**SG 11211**

Square Smart Fix 80 mm




**SG 11212**

Square Smart Fix 100 mm




**SG 11213**

Square Smart Fix 120 mm




**SG 11214**

Square Smart Fix 150 mm




**SG 11215**

Square Smart Fix 200 mm




**SG 11154**

Universal Smart Fix 120 mm



**SG 11155**

Universal Smart Fix 150 mm




**SG 11156**

Universal Smart Fix 200 mm

# SYSTEM OPTIONS

## A. WAVE



SG 6365



SG 10854




SG 10856




SG 10867



SG 10887




SG 10905




SG 10924

### Standard components:

- SG 6365 Wave hanger
- SG 10854 Wave overlap arm support
- SG 10856 Wave end stop, belt return
- SG 10867 Panhead screw
- SG 10887 Wave overlap arm set
- SG 10905 Wave glider cord 80 mm
- SG 10924 Wave glider support



SG 10845




SG 10906

### Optional components:


- SG 10845 Wave master carrier single stack 80 mm
- SG 10906 Wave glider cord 60 mm (no single stack)




SG 3582



SG 6349



SG 6363



SG 10075





SG 10076

### Curtain components:

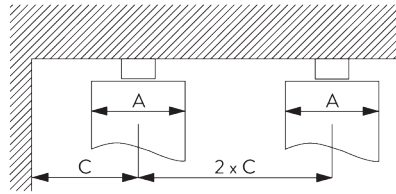- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - glider cord (standard components)



A = Stack depth  
B = Stack size  
C = Min. distance

| Glider cord<br>SG 10905 | Pockets between<br>hooks | Approx. curtain<br>fullness | Stack depth<br>A | Stack size<br>B*          | Min distance<br>C |
|-------------------------|--------------------------|-----------------------------|------------------|---------------------------|-------------------|
| 80                      | 6                        | ~2.1                        | 140              | 180 per metre<br>of track | 90                |
| 80                      | 7                        | ~2.3                        | 160              | 180 per metre<br>of track | 100               |

| Glider cord<br>SG 10906 | Pockets between<br>hooks | Approx. curtain<br>fullness | Stack depth<br>A | Stack size<br>B*          | Min distance<br>C |
|-------------------------|--------------------------|-----------------------------|------------------|---------------------------|-------------------|
| 60                      | 4                        | ~2.1                        | 100              | 230 per metre<br>of track | 70                |
| 60                      | 5                        | ~2.3                        | 120              | 230 per metre<br>of track | 80                |

\*Stack size B plus 180 mm for each curtain stack!

# MOTORS & CONTROLS

## A. MOTOR FEATURES

| Motors | SG 5190 | SG 5192 | SG 5193 |
|--------|---------|---------|---------|
|--------|---------|---------|---------|

### Motor Features

|                                                      |       |       |       |
|------------------------------------------------------|-------|-------|-------|
| Soft start / stop                                    | •     | •     | •     |
| Touch & Go                                           | •     | •     |       |
| Manual Override                                      | •     | •     | •     |
| Built-in receiver                                    | •     | •     |       |
| Electronic end-stop                                  | •     | •     | •     |
| Electronic revolution counter (unlimited revolution) | •     | •     | •     |
| Parallel wiring possible without additional relays   | •     | •     | •     |
| Cable connectable with plug into motor               |       | •     |       |
| IP class                                             | IP 20 | IP 20 | IP 20 |

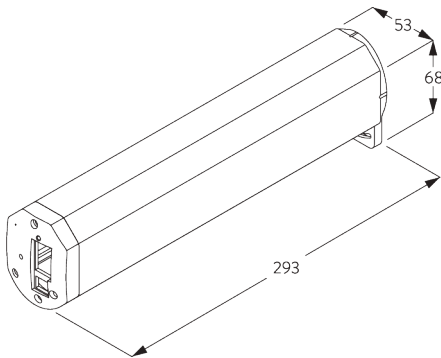
### Control Features

|                                                                           |   |   |   |
|---------------------------------------------------------------------------|---|---|---|
| Mains power control                                                       |   |   | • |
| Dry contact control                                                       | • | • |   |
| Dry contact and / or SG Control A                                         | • | • |   |
| SG Control A                                                              | • | • |   |
| Suitable for all common home automation systems (with suitable interface) | • | • | • |

**B. MOTOR**  
**SPECIFICATIONS**

| Motors  | Motor dimensions    | Voltage        | Current     | Frequency  | System speed / sec | Frequency receiver |
|---------|---------------------|----------------|-------------|------------|--------------------|--------------------|
| SG 5190 | L 293 x W 53 x D 68 | 100 - 240 V AC | 0.8 - 0.4 A | 50 / 60 Hz | 15 cm / sec        | 433 MHz            |
| SG 5192 | L 293 x W 53 x D 68 | 24 V DC        | 3.5 A       | n/a        | 15 cm / sec        | 433 MHz            |
| SG 5193 | L 293 x W 53 x D 68 | 100 - 240 V AC | 0.8 - 0.4 A | 50 / 60 Hz | 15 cm / sec        | n/a                |

**C. MOTOR**  
**DIMENSIONS**



**D. OPERATING**  
**METHODS**

See catalogue "controls" for details.

Wall switch



System can be operated by fixed wall switch.

Silent Gliss Control A



Various radio hand-held and wall transmitters available.












**E. WIRING**  
**DIAGRAMS**





















Refer to Silent Gliss website.


















# PARTS

## A. STANDARD PARTS

|                                                                                    |                                                            |
|------------------------------------------------------------------------------------|------------------------------------------------------------|
|    | <b>SG 5190</b><br>Motor 100-240V AC, 1/130, radio receiver |
|    | <b>SG 10815</b><br>Cover                                   |
|    | <b>SG 10823</b><br>Belt connector arm                      |
|    | <b>SG 10824</b><br>Belt connector pin                      |
|    | <b>SG 10825</b><br>Belt                                    |
|   | <b>SG 10836</b><br>Mask pair stack                         |
|  | <b>SG 10925</b><br>Profile                                 |
|  | <b>SG 10926</b><br>Clamp                                   |
|  | <b>SG 10931</b><br>Roller                                  |
|  | <b>SG 10933</b><br>Gear drive set                          |
|  | <b>SG 10936</b><br>Overlap arm                             |
|  | <b>SG 10940</b><br>Guide return                            |
|  | <b>SG 10945</b><br>End stop                                |



## B. OPTIONAL PARTS

|                                                                                       |                                                              |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------|
|      | <b>SG 3582</b><br>Hook                                       |
|      | <b>SG 5192</b><br>Motor 24V DC, 1/130, radio receiver        |
|      | <b>SG 5193</b><br>Motor 100-240V AC, 1/130, mains controlled |
|      | <b>SG 6349</b><br>Wave curtain tape                          |
|      | <b>SG 6363</b><br>Wave top hemming tape                      |
|     | <b>SG 6365</b><br>Wave hanger                                |
|    | <b>SG 9959</b><br>Central control unit relay                 |
|    | <b>SG 10075</b><br>Lead weight 50 g/m                        |
|    | <b>SG 10076</b><br>Fabric weight                             |
|    | <b>SG 10822</b><br>Master carrier                            |
|    | <b>SG 10845</b><br>Wave master carrier 80 mm                 |
|    | <b>SG 10854</b><br>Wave overlap plate                        |
|    | <b>SG 10856</b><br>Wave extension                            |
|    | <b>SG 10867</b><br>Pan head screw Freedriv M4x16             |
|    | <b>SG 10887</b><br>Wave extension                            |
|    | <b>SG 10905</b><br>Wave glider cord 80 mm                    |
|    | <b>SG 10906</b><br>Wave glider cord 60 mm                    |
|    | <b>SG 10924</b><br>Wave glider support                       |
|    | <b>SG 10927</b><br>Hook                                      |
|   | <b>SG 10943</b><br>Connection bridge                         |
|  | <b>SG 10946</b><br>Radio hand held 1 channel                 |
|  | <b>SG 10947</b><br>Radio hand held 2+1 channel               |
|  | <b>SG 10948</b><br>Radio hand held 6+1 channel               |
|  | <b>SG 10949</b><br>Radio wall transmitter 1 channel          |
|  | <b>SG 10950</b><br>Radio wall transmitter 2 channel          |
|  | <b>SG 10951</b><br>Radio wall transmitter 5+1 channel        |
|  | <b>SG 11127</b><br>Countersunk head screw M4x10              |
|  | <b>SG 11154</b><br>Universal Smart Fix 120 mm                |

|                                                                                     |                                                 |                                                                                   |                                                                  |
|-------------------------------------------------------------------------------------|-------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------|
|    | <b>SG 11155</b><br>Universal Smart Fix 150 mm   |  | <b>SG 11414</b><br>Power supply 24V / 4A including cable EU plug |
|    | <b>SG 11156</b><br>Universal Smart Fix 200 mm   |  | <b>SG 11961</b><br>Power supply set 24V/4A with EU plug          |
|    | <b>SG 11158</b><br>Countersunk head screw M4x12 |  | <b>SG 11962</b><br>Power supply set 24V/4A with CH plug          |
|    | <b>SG 11201</b><br>Smart Fix 80 mm              |                                                                                   |                                                                  |
|    | <b>SG 11202</b><br>Smart Fix 100 mm             |                                                                                   |                                                                  |
|   | <b>SG 11203</b><br>Smart Fix 120 mm             |                                                                                   |                                                                  |
|  | <b>SG 11204</b><br>Smart Fix 150 mm             |                                                                                   |                                                                  |
|  | <b>SG 11205</b><br>Smart Fix 200 mm             |                                                                                   |                                                                  |
|  | <b>SG 11211</b><br>Square Smart Fix 80 mm       |                                                                                   |                                                                  |
|  | <b>SG 11212</b><br>Square Smart Fix 100 mm      |                                                                                   |                                                                  |
|  | <b>SG 11213</b><br>Square Smart Fix 120 mm      |                                                                                   |                                                                  |
|  | <b>SG 11214</b><br>Square Smart Fix 150 mm      |                                                                                   |                                                                  |
|  | <b>SG 11215</b><br>Square Smart Fix 200 mm      |                                                                                   |                                                                  |
|  | <b>SG 11295</b><br>End stop                     |                                                                                   |                                                                  |

# SG 5600

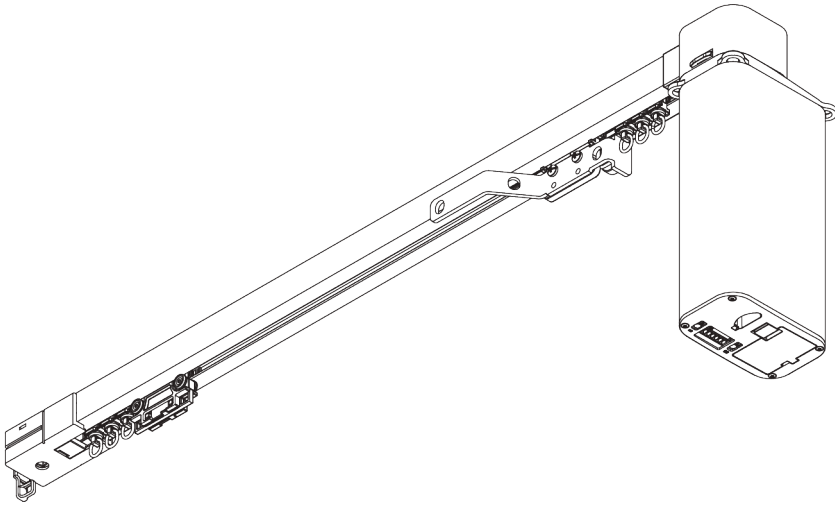---



## PRODUCT INFORMATION

- **Operation:** motorised
- **Range:** S - L
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016, black RAL 9005 or anodised aluminum, special colours possible (recess profile only in white RAL 9016, black RAL 9005 or special color)
- **Fabrics:** refer to Silent Gliss fabric collection

### Features:

- Quiet, fast and powerful motor
- 2-component (2C) roller technology
- Wave (2C)
- Various control options
- Touch & Go
- Manual override incl. permanent positioning sensor
- Easy programming
- 100-250 AC and / or 24 V DC in one motor
- Bendable
- Bendable recess profile

# SYSTEM SPECIFICATIONS

## A. SYSTEM DIMENSIONS



25 m



65 kg

### Max. curtain weights with 2C rollers / Wave rollers

Up to 12 m: Touch & Go,  
manual override, auto  
programming mode

|           | 2 m | 4 m | 6 m | 8 m | 10 m | 12 m | 15 m | 18 m | 21 m | 25 m |
|-----------|-----|-----|-----|-----|------|------|------|------|------|------|
|           | 25  | 45  | 45  | 50  | 65   | 45   | 45   | 45   | 45   | 40   |
|           | 25  | 45  | 45  | 50  | 65   | 45   | 45   | 45   | 45   | 40   |
|           | 25  | 35  | 35  | 40  | 35   | 35   | 35   | 32   | 29   | 25   |
|           | 25  | 35  | 35  | 40  | 35   | 35   | 35   | 32   | 29   | 25   |
|           | 25  | 30  | 30  | 30  | 25   | 25   | 22   | 19   | 15   | -    |
|           | 25  | 30  | 30  | 30  | 25   | 25   | 22   | 19   | 15   | -    |
|           | 20  | 20  | 20  | 18  | 16   | 12   | 10   | -    | -    | -    |
|           | 20  | 20  | 20  | 18  | 16   | 12   | 10   | -    | -    | -    |
| (kg max.) |     |     |     |     |      |      |      |      |      |      |


### Max. curtain weights with Wave gliders

|           | 2 m | 4 m | 6 m | 8 m | 10 m |
|-----------|-----|-----|-----|-----|------|
|           | 20  | 25  | 25  | 25  | 20   |
|           | 20  | 25  | 25  | 25  | 20   |
|           | 20  | 20  | 20  | 20  | 15   |
|           | 20  | 20  | 20  | 20  | 15   |
|           | 20  | 20  | 20  | 15  | 10   |
|           | 20  | 20  | 20  | 15  | 10   |
|           | 20  | 20  | 15  | 8   | -    |
|           | 20  | 20  | 15  | 8   | -    |
| (kg max.) |     |     |     |     |      |




## B. PROFILE

### Profile and bending information



**SG 10850**

Profile




**SG 10862**

Recess profile


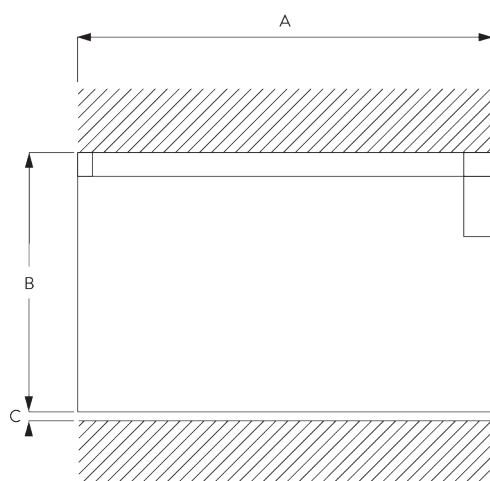
## C. HOW TO MEASURE



A: System width  
B: System height  
C: Distance between floor and fabric

## D. SPECIFICATION

### TEXT

#### EN

*Silent Gliss 5600 Electrically Operated Curtain Track with motor. Comprises aluminium profile SG 10850 in silver anodized / white powder coated finish alternatively a specified RAL colour. Complete and ready assembled with interference free brushless motor SG. Supplied with 2C roller gliders SG 10840. Features manual 'Touch and Go' operation and manual override in the event of power failure. Top fixed with clamps SG 3004/3041 at max. 500 mm centres / face fixed with Silent Gliss Smart Fix. Optional recess profile SG 10862. Controlled through wall switch/wireless switch or a Smart house solution. Can be used with system Wave.*

#### SV

*Silent Gliss SG 5600 eldragssystem med motor. Består av aluminiumprofil SG 10850 i specificerad längd i vitlack, alu natur eller angiven RAL färg komplett med borstlös och störningsfri motor SG 9060 monterad. 10 st SG 10840 2C rullglid per meter. Ingår inställningsmöjlighet "Touch and Go" med manuell start och säkerhetsfunktion vid strömbrott. Takmonteras med fäste SG 3004/3041 c/c 500 mm. Vägghävt montering med SG Smart Fix c/c 500 mm. Kan levereras med infällningsprofil SG 10862. Styrning med väggkontakt/trådlös sändare/inkoppling mot Smarthus system. Kan användas med system Wave.*

#### NO

*Silent Gliss SG 5600 Elektrisk gardinskinne. Består av aluminiumprofil SG 10850 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. Borsteløs og lydløs motor SG 9060. 10 stk SG 10840 2C rulleglidere pr meter. Funksjonen «touch and go» er en manuell sikkerhetsfunksjon ved strømtans. Takmonteres med feste SG 10926 c/c 500 mm. Veggmontering med SG Smart Fix c/c 500 mm. Kan leveres med profil for innfelling SG 10862. Styling med veggkontakt/ trådløs sender /innkobling mot Smarthus system. Kan kombineres med Wave system.*

#### DA



*Silent Gliss 5600 elektrisk gardinskinnesystem med motor. Består af en aluminiumprofil SG 10850, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. Fuldstændig klart og samlet med interferensfri børsteløs motor SG. Leveres med 2C rulleglidere SG 10840. Har en manuel "Touch and Go" funktion med håndbetjening ved strømafbrydelser. Loftmonteres med klemmerne SG 3004/3041 med en afstand på højst 500 mm eller væghmonteres med Silent Gliss Smart Fix. Kan leveres med indfældningsprofil SG 10862. Styes med en vægkontakt, trådløs kontakt eller en Smart house-løsning. Kan bruges med system Wave.*

# FITTING

## A. FITTING INFORMATION

### Fixing points


For detailed fitting information, visit the Silent Gliss website.



Motor holder to be fixed (ceiling fitting only).

## B. CEILING FITTING


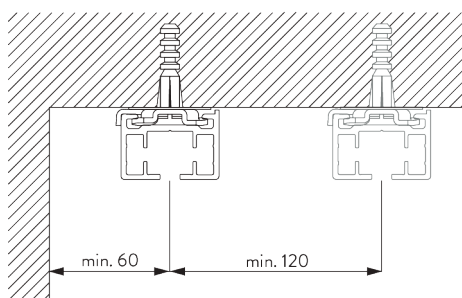
### Clamp SG 3004



**SG 3004**


Clamp
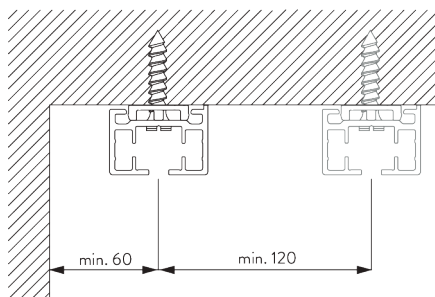
### Direct fitting (2C roller only)



**SG 7002**

Profile protector




**SG 10865**


Support plate

C. WALL FITTING

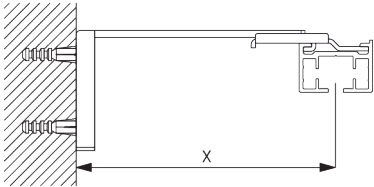
Smart Fix




**Smart Fix SG 11200 - SG 11205 and bracket SG 3041:**  
Screw SG 10492 (M4x8) needed.



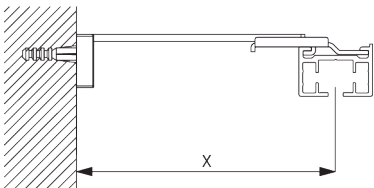
**Smart Fix SG 11200 - SG 11205 and clamp SG 3004:**  
Screw SG 10074 (M4x8) needed.




**Square Smart Fix SG 11210 - SG 11215 and bracket SG 3041:**  
Screw SG 10492 (M4x8) needed.



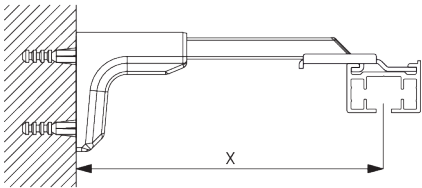**Square Smart Fix SG 11210 - SG 11215 and clamp SG 3004:**  
Screw SG 10074 (M4x8) needed.




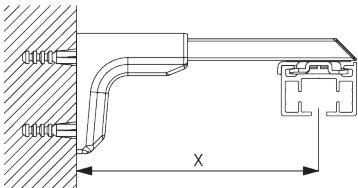**Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3041:**  
Screw SG 10407 (M4x10) needed.




**Universal Smart Fix SG 11154 - SG 11156 and clamp SG 3004:**  
Screw SG 11158 (M4x12) needed.

| Smart Fix           | X mm (SG 3041) | X mm (SG 3004) |
|---------------------|----------------|----------------|
| SG 11200 / SG 11210 | 83             |                |
| SG 11201 / SG 11211 | 103            | 72             |
| SG 11202 / SG 11212 | 123            | 92             |
| SG 11203 / SG 11213 | 143            | 112            |
| SG 11204 / SG 11214 | 173            | 142            |
| SG 11205 / SG 11215 | 223            | 192            |
| SG 11154            | 128-156        | 102-130        |
| SG 11155            | 158-186        | 132-160        |
| SG 11156            | 208-236        | 182-210        |



**SG 3004**  
Clamp



**SG 3041**  
Bracket



**SG 10074**  
Countersunk head screw  
M4x8




**SG 10407**  
Pan head screw M4x10  
M4x8




**SG 10492**  
Pan head screw M4x8




**SG 11158**  
Countersunk head screw  
M4x12




**SG 11200**  
Smart Fix 60 mm




**SG 11201**  
Smart Fix 80 mm




**SG 11202**  
Smart Fix 100 mm




**SG 11203**  
Smart Fix 120 mm




**SG 11204**  
Smart Fix 150 mm




**SG 11205**  
Smart Fix 200 mm




**SG 11210**  
Square Smart Fix 60 mm




**SG 11211**  
Square Smart Fix 80 mm




**SG 11212**  
Square Smart Fix 100 mm




**SG 11213**  
Square Smart Fix 120 mm




**SG 11214**  
Square Smart Fix 150 mm




**SG 11215**  
Square Smart Fix 200 mm



**SG 11154**  
Universal Smart Fix 120 mm




**SG 11155**  
Universal Smart Fix 150 mm




**SG 11156**  
Universal Smart Fix 200 mm

D. RECESS FITTING

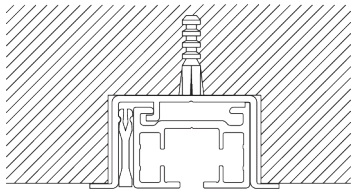
Recess profile  
SG 10862




One wedge SG 5118 per fixing point.  
For detailed recess fitting, visit the Silent Gliss website.




SG 5118  
Wedge



SG 10863  
Recess mask




SG 10862  
Recess profile




SG 10864  
Recess mask

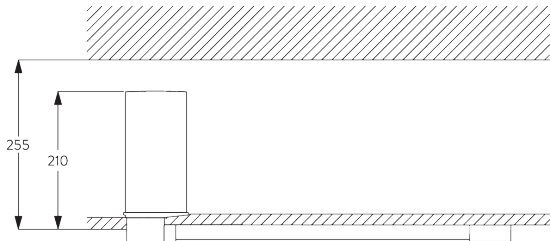Motor recessed in  
suspended ceiling



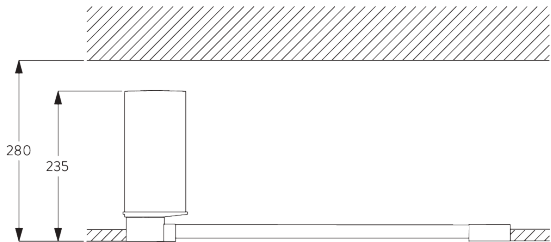
Profile mounted with clamp SG 3004.  
  
Access to the ceiling space is necessary for assembly /  
programming.




Profile SG 10862 recessed into ceiling.  
  
Access to the ceiling space is necessary for assembly /  
programming.

## **E. SUSPENDED FITTING**

### **Hanger SG 6105**




*Curtain weight reduces by 30%.*




#### **SG 6105**

*Hanger with plate*
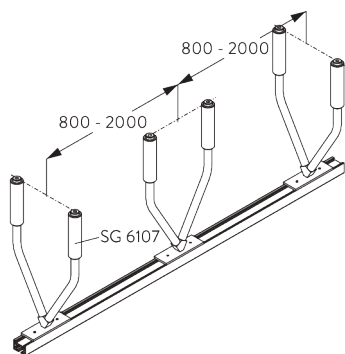
### **V-hanger SG 6107**



*Curtain weight reduces by 30%.*




#### **SG 6107**

*V-Hanger with plate*

# SYSTEM OPTIONS


## A. WAVE



SG 6365



SG 10844



SG 10852



SG 10854



SG 10856



SG 10867




SG 10886




SG 10887

### Standard components:


- SG 6365 Wave hanger
- SG 10844 Wave end stop
- SG 10852 Wave 2C roller cord, 80 mm
- SG 10854 Wave overlap arm support
- SG 10856 Wave end stop, belt return
- SG 10867 Panhead screw
- SG 10886 Wave extension
- SG 10887 Wave overlap arm set




SG 10845




SG 10869



SG 10905



SG 10906




SG 10924

### Optional components:


- SG 10845 Wave master carrier single stack 80 mm
- SG 10869 Wave 2C roller cord, 60 mm (no single stack)
- SG 10905 Wave glider cord, 80 mm
- SG 10906 Wave glider cord, 60 mm (no single stack)
- SG 10924 Wave glider support




SG 3582



SG 6349



SG 6363





SG 10075



SG 10076

### Curtain components:

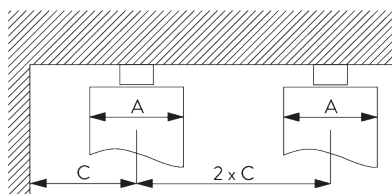- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight



A = Stack depth  
B = Stack size  
C = Min. distance

| Roller / glider cord<br>SG 10852 / 10905 | Pockets between<br>hooks | Approx. curtain<br>fullness | Stack depth<br>A | Stack size<br>B*          | Min distance<br>C |
|------------------------------------------|--------------------------|-----------------------------|------------------|---------------------------|-------------------|
| 80                                       | 6                        | ~2.1                        | 140              | 210 per metre<br>of track | 90                |
| 80                                       | 7                        | ~2.3                        | 160              | 210 per metre<br>of track | 100               |

| Roller / glider cord<br>SG 10869 / 10906 | Pockets between<br>hooks | Approx. curtain<br>fullness | Stack depth<br>A | Stack size<br>B*          | Min distance<br>C |
|------------------------------------------|--------------------------|-----------------------------|------------------|---------------------------|-------------------|
| 60                                       | 4                        | ~2.1                        | 100              | 260 per metre<br>of track | 70                |
| 60                                       | 5                        | ~2.3                        | 120              | 260 per metre<br>of track | 80                |

\*Stack size B plus 190 mm for each curtain stack!

# MOTOR & CONTROLS

## A. MOTOR FEATURES

|       |         |
|-------|---------|
| Motor | SG 9060 |
|-------|---------|

### Motor Features

|                                                      |       |
|------------------------------------------------------|-------|
| Soft start / stop                                    | •     |
| Touch & Go                                           | •     |
| Manual Override                                      | •     |
| Modular radio system (optional)                      | •     |
| Electronic end-stop                                  | •     |
| Electronic revolution counter (unlimited revolution) | •     |
| Two intermediate positions possible                  | •     |
| Parallel wiring possible without additional relays   | •     |
| High-end DC motor with brushless technology          | •     |
| Permanent positioning sensor (even without power)    | •     |
| 100 - 250 V AC and / or 24 V DC in one motor         | •     |
| Cable connectable with plug into motor               | •     |
| IP class                                             | IP 40 |

### Control Features

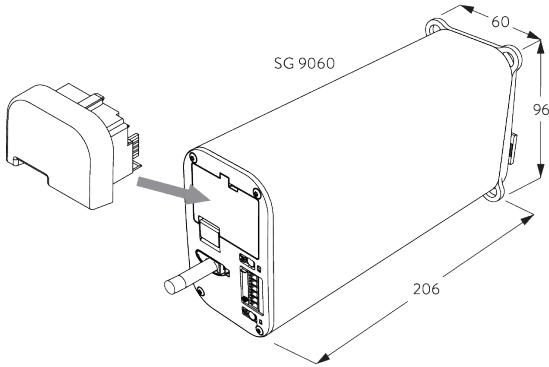
|                                                                           |   |
|---------------------------------------------------------------------------|---|
| Mains power control                                                       | • |
| Dry contact control                                                       | • |
| Dry contact and / or SG Control N (with radio module)                     | • |
| SG Control N (with radio module)                                          | • |
| Smart by Silent Gliss (with smart module)                                 | • |
| Suitable for all common home automation systems (with suitable interface) | • |



B. MOTOR  
SPECIFICATIONS

| Motor                   | Motor dimensions    | Voltage AC     | Voltage DC | Current     | Frequency  | System speed / sec | Frequency receiver |
|-------------------------|---------------------|----------------|------------|-------------|------------|--------------------|--------------------|
| SG 9060                 | L 206 x W 60 x D 96 | 100 - 250 V AC | 24 V DC    | 1.3 - 0.5 A | 50 - 60 Hz | 21 cm / sec        | -                  |
| SG 9060 w/ SG Control N | L 226 x W 60 x D 96 | 100 - 250 V AC | 24 V DC    | 1.3 - 0.5 A | 50 - 60 Hz | 21 cm / sec        | 433 MHz            |
| SG 9060 w/ Smart by SG  | L 226 x W 60 x D 96 | 100 - 250 V AC | 24 V DC    | 1.3 - 0.5 A | 50 - 60 Hz | 21 cm / sec        | Smart by SG        |

C. MOTOR  
DIMENSIONS /  
MODULES



Motor SG 9060 can be equipped with following modules:

- SG 11939 Radio module SG Control N
- SG 11270 Smart module

See catalogue "controls" for details.

D. OPERATING  
METHODS

See catalogue "controls" for details.

Wall switch



System can be operated by fixed wall switch.

SG Control N



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

Smart by Silent Gliss



Open designed two-way communication system which allows to flawlessly integrate products with most major building management systems. Smart module SG 11270 required.













E. WIRING  
DIAGRAMS








Refer to Silent Gliss website.










# PARTS








































## A. STANDARD PARTS


|                                                                                     |                                                              |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------|
|    | <b>SG 3004</b><br>Clamp                                      |
|    | <b>SG 9060</b><br>Motor 100-250V AC & 24V DC                 |
|    | <b>SG 9917</b><br>Hirschmann portable socket-outlet STAK 3 N |
|    | <b>SG 10725</b><br>Programming distance holder               |
|    | <b>SG 10815</b><br>Cover                                     |
|   | <b>SG 10816</b><br>Cover                                     |
|  | <b>SG 10817</b><br>Motor holder                              |
|  | <b>SG 10819</b><br>Belt return                               |
|  | <b>SG 10821</b><br>Overlap arm                               |
|  | <b>SG 10822</b><br>Master carrier                            |
|  | <b>SG 10823</b><br>Belt connector arm                        |
|  | <b>SG 10824</b><br>Belt connector pin                        |
|  | <b>SG 10825</b><br>Belt                                      |
|  | <b>SG 10826</b><br>Overlap arm support                       |

|                                                                                    |                                                  |
|------------------------------------------------------------------------------------|--------------------------------------------------|
|   | <b>SG 10836</b><br>Mask pair stack               |
|   | <b>SG 10837</b><br>Pilot runner                  |
|   | <b>SG 10838</b><br>Pilot runner                  |
|   | <b>SG 10840</b><br>2C roller                     |
|   | <b>SG 10850</b><br>Profile                       |
|  | <b>SG 10923</b><br>Pan head screw Freedriv M4x12 |

## B. OPTIONAL PARTS

|                                                                                       |                                                |
|---------------------------------------------------------------------------------------|------------------------------------------------|
|    | <b>SG 3041</b><br>Bracket                      |
|    | <b>SG 3582</b><br>Hook                         |
|    | <b>SG 5118</b><br>Wedge                        |
|    | <b>SG 6105</b><br>Hanger with plate            |
|    | <b>SG 6107</b><br>V-Hanger with plate          |
|   | <b>SG 6349</b><br>Wave curtain tape            |
|  | <b>SG 6363</b><br>Wave top hemming tape        |
|  | <b>SG 6365</b><br>Wave hanger                  |
|  | <b>SG 7002</b><br>Profile protector            |
|  | <b>SG 9916</b><br>Hirschmann plug set          |
|  | <b>SG 10074</b><br>Countersunk head screw M4x8 |
|  | <b>SG 10075</b><br>Lead weight 50 g/m          |
|  | <b>SG 10076</b><br>Fabric weight               |
|  | <b>SG 10293</b><br>Cable 230V AC, 2/3/5/10 m   |

|                                                                                    |                                                  |                                                                                     |                                                 |                                                                                       |                                                                |
|------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------|
|    | <b>SG 10714</b><br>Plug 6-pin, MC 1.5/6-ST-3.81  |    | <b>SG 10886</b><br>Wave extension               |    | <b>SG 11205</b><br>Smart Fix 200 mm                            |
|    | <b>SG 10820</b><br>Overlap arm                   |    | <b>SG 10887</b><br>Wave extension               |    | <b>SG 11210</b><br>Square Smart Fix 60 mm                      |
|    | <b>SG 10831</b><br>Connection bridge             |    | <b>SG 10905</b><br>Wave glider cord 80 mm       |    | <b>SG 11211</b><br>Square Smart Fix 80 mm                      |
|    | <b>SG 10844</b><br>Wave end stop                 |    | <b>SG 10906</b><br>Wave glider cord 60 mm       |    | <b>SG 11212</b><br>Square Smart Fix 100 mm                     |
|    | <b>SG 10845</b><br>Wave master carrier 80 mm     |    | <b>SG 10924</b><br>Wave glider support          |    | <b>SG 11213</b><br>Square Smart Fix 120 mm                     |
|   | <b>SG 10852</b><br>Wave 2C roller cord 80 mm     |   | <b>SG 11154</b><br>Universal Smart Fix 120 mm   |   | <b>SG 11214</b><br>Square Smart Fix 150 mm                     |
|  | <b>SG 10854</b><br>Wave overlap plate            |  | <b>SG 11155</b><br>Universal Smart Fix 150 mm   |  | <b>SG 11215</b><br>Square Smart Fix 200 mm                     |
|  | <b>SG 10856</b><br>Wave extension                |  | <b>SG 11156</b><br>Universal Smart Fix 200 mm   |  | <b>SG 11260</b><br>Gateway Cedia                               |
|  | <b>SG 10862</b><br>Recess profile                |  | <b>SG 11158</b><br>Countersunk head screw M4x12 |  | <b>SG 11261</b><br>Gateway KNX                                 |
|  | <b>SG 10863</b><br>Recess mask                   |  | <b>SG 11200</b><br>Smart Fix 60 mm              |  | <b>SG 11262</b><br>Expansion unit                              |
|  | <b>SG 10864</b><br>Recess mask                   |  | <b>SG 11201</b><br>Smart Fix 80 mm              |  | <b>SG 11264</b><br>Power supply 24V DC, 3.8 Ampere<br>DIN Rail |
|  | <b>SG 10865</b><br>Support plate                 |  | <b>SG 11202</b><br>Smart Fix 100 mm             |  | <b>SG 11265</b><br>Power supply 24V DC, 5 Ampere<br>DIN Rail   |
|  | <b>SG 10867</b><br>Pan head screw Freedriv M4x16 |  | <b>SG 11203</b><br>Smart Fix 120 mm             |  | <b>SG 11266</b><br>Power supply 24V DC, 10 Ampere<br>DIN Rail  |
|  | <b>SG 10869</b><br>Wave 2C roller cord 60 mm     |  | <b>SG 11204</b><br>Smart Fix 150 mm             |  | <b>SG 11270</b><br>Smart module                                |




---

**SG 11295**

*End stop*

---




---

**SG 11325**

*Smart plug 6-pin, MC 1.5/6 ST-3.81*

---




---

**SG 11900**

*Move Server*

---




---

**SG 11931**

*Radio hand held 1 channel*

---



---

**SG 11932**

*Radio hand held 6 channel*

---



---

**SG 11936**

*Radio wall transmitter 1 channel*

---




---

**SG 11937**

*Radio wall transmitter 6 channel*

---




---

**SG 11939**

*Radio modul control N*

---




---

**SG 11961**

*Power supply set 24V/4A with EU plug*

---



---



**SG 11962**

*Power supply set 24V/4A with CH plug*

---

# SG 5800

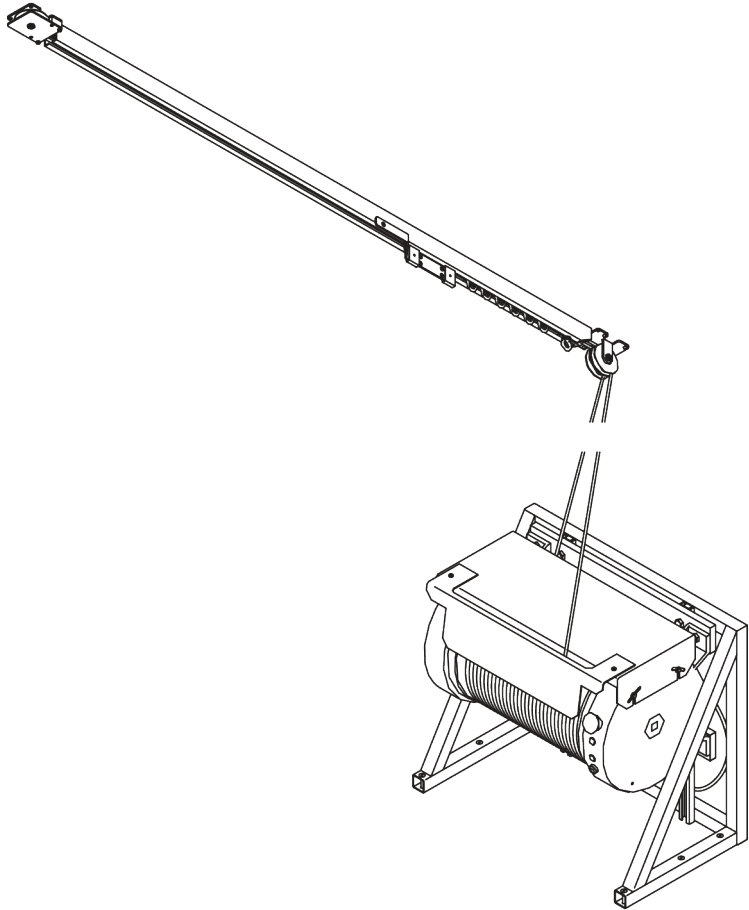---



## PRODUCT INFORMATION

- **Operation:** motorised
- **Range:** L
- **Fitting:** ceiling, floor/wall motor fitting
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

### **Features:**

- Stage system
- Various control options
- Emergency stop button
- Bendable

# SYSTEM SPECIFICATIONS

## A. SYSTEM DIMENSIONS



60 m




270 kg

### Max. curtain weights

|           | 10 m | 20 m | 30 m | 40 m | 50 m | 60 m |
|-----------|------|------|------|------|------|------|
|           | 245  | 227  | 210  | -    | -    | -    |
|           | 270  | 252  | 234  | 216  | 198  | 180  |
|           | 185  | 173  | 160  | -    | -    | -    |
|           | 190  | 180  | 170  | 160  | 150  | 140  |
|           | 135  | 127  | 120  | -    | -    | -    |
|           | 140  | 132  | 124  | 116  | 108  | 100  |
|           | 70   | 65   | 60   | -    | -    | -    |
|           | 75   | 68   | 61   | 54   | 47   | 40   |
|           | 55   | 45   | 40   | -    | -    | -    |
|           | 60   | 57   | 54   | 51   | 48   | 45   |
| (kg max.) |      |      |      |      |      |      |

## B. PROFILE

### Profile and bending information




SG 5810

Profile




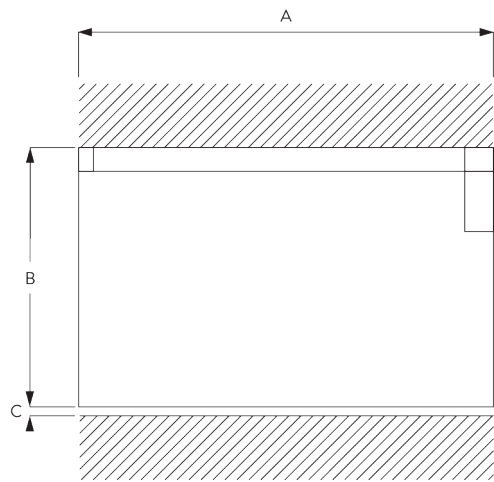C. HOW TO  
MEASURE



A: System width  
B: System height  
C: Distance between floor and fabric

Parallel mounting of  
profiles




For better overlapping, two profiles can be mounted in parallel. Min. 76 mm between centre parts of return pulleys.

FITTING

A. FITTING  
INFORMATION



For detailed fitting information, visit the Silent Gliss website.

Fixing points



B. CEILING FITTING

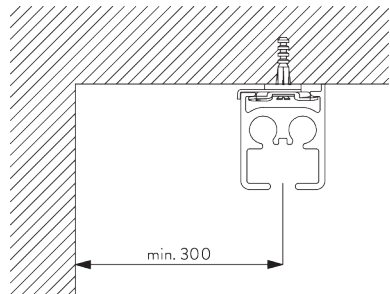
Clamp SG 6209




SG 6209  
Clamp

## C. MOTOR FITTING
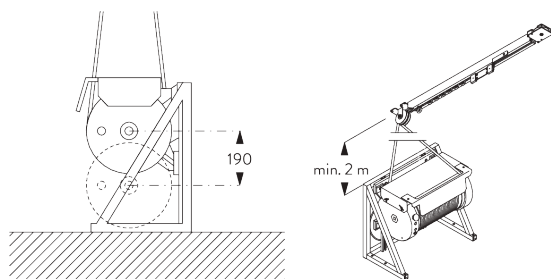
### Floor with frame SG 5813 and SG 5821 / SG 5822




Steel core rope is tensioned by using the motor weight.  
Vertical variation possible up to 190 mm.




**SG 5813**

Floor mounting frame



**SG 5821**


Anchor rail




**SG 5822**

Sliding block
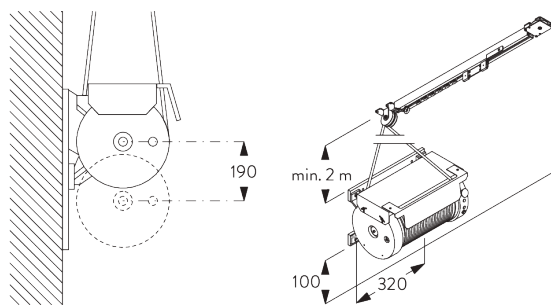
### Wall with SG 5821 / SG 5822




Steel core rope is tensioned by using the motor weight.  
Vertical variation possible up to 190 mm.



**SG 5821**


Anchor rail



**SG 5822**

Sliding block

### Wall above track





# MOTOR & CONTROLS

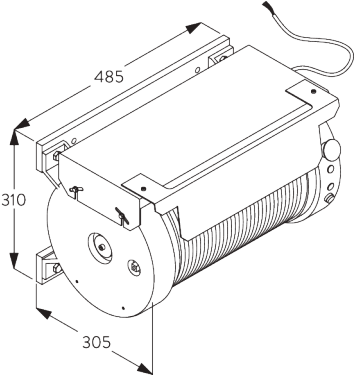
## A. MOTOR FEATURES

| Motor                                                                     | SG 5805<br>230 V AC | SG 5805<br>115 V AC |
|---------------------------------------------------------------------------|---------------------|---------------------|
| <b>Motor Features</b>                                                     |                     |                     |
| Mechanical end-stop                                                       | ●                   | ●                   |
| Mechanical revolution counter (limited revolution)                        | ●                   | ●                   |
| <b>Control Features</b>                                                   |                     |                     |
| Mains power control                                                       | ●                   | ●                   |
| SG Control N (external receiver required)                                 | ●                   | ●                   |
| Suitable for all common home automation systems (with suitable interface) | ●                   | ●                   |

## B. MOTOR SPECIFICATIONS

| Motor   | Motor<br>dimensions   | Power | Voltage  | Current | Frequency | System<br>speed / sec |
|---------|-----------------------|-------|----------|---------|-----------|-----------------------|
| SG 5805 | L 485 x W 305 x H 310 | 500 W | 230 V AC | 2.2 A   | 50 Hz     | 20 cm / sec           |
| SG 5805 | L 485 x W 305 x H 310 | 550 W | 115 V AC | 5 A     | 60 Hz     | 20 cm / sec           |

## C. MOTOR DIMENSIONS



## D. OPERATING METHODS

Wall switch



System can be operated by fixed wall switch.

SG Control N



Various radio hand-held and wall transmitters available.  
An external receiver is required.  
See catalogue "controls" for details.



*Silent Gliss Move App.  
See catalogue "controls" for details.*

## **SG Control R**



*Various radio hand-held and wall transmitters available.  
An external receiver is required.  
See catalogue "controls" for details.*








## **E. WIRING** **DIAGRAMS**











*Refer to Silent Gliss website.*

# PARTS

## A. STANDARD PARTS

|                                                                                    |                                         |
|------------------------------------------------------------------------------------|-----------------------------------------|
|    | <b>SG 5805</b><br>Motor 230V AC, 15/200 |
|    | <b>SG 5806</b><br>Pilot runner          |
|    | <b>SG 5809</b><br>Roller                |
|    | <b>SG 5810</b><br>Profile               |
|    | <b>SG 5811</b><br>Overlap arm           |
|   | <b>SG 5814</b><br>Steel wire            |
|  | <b>SG 5815</b><br>Guide return          |
|  | <b>SG 5816</b><br>Cord guide            |
|  | <b>SG 5821</b><br>Anchor rail           |
|  | <b>SG 5822</b><br>Sliding block         |
|  | <b>SG 5824</b><br>End stop              |
|  | <b>SG 6209</b><br>Clamp                 |
|  | <b>SG 9916</b><br>Hirschmann plug set   |

## B. OPTIONAL PARTS

|                                                                                     |                                                     |
|-------------------------------------------------------------------------------------|-----------------------------------------------------|
|    | <b>SG 5813</b><br>Floor mounting frame              |
|    | <b>SG 5829</b><br>Fixing plate                      |
|    | <b>SG 6203</b><br>Connection bridge                 |
|    | <b>SG 6228</b><br>Bracket                           |
|    | <b>SG 11900</b><br>Move Server                      |
|   | <b>SG 11931</b><br>Radio hand held 1 channel        |
|  | <b>SG 11932</b><br>Radio hand held 6 channel        |
|  | <b>SG 11936</b><br>Radio wall transmitter 1 channel |
|  | <b>SG 11937</b><br>Radio wall transmitter 6 channel |
|  | <b>SG 11938</b><br>Radio receiver BiDi Shutter      |

## ***The Architects of Silence***

***Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the worlds` smoothest, quietest systems using state of the art technology.***

*Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.*

### **Oy Vallila Contract Ab**

Nilsjängatu 15

FI-00510 Helsinki

**T** +358 (0)20 776 7700

**F** +358 (0)20 776 7701

[silentgliss@vallilainterior.fi](mailto:silentgliss@vallilainterior.fi)

**silentgliss.fi**