
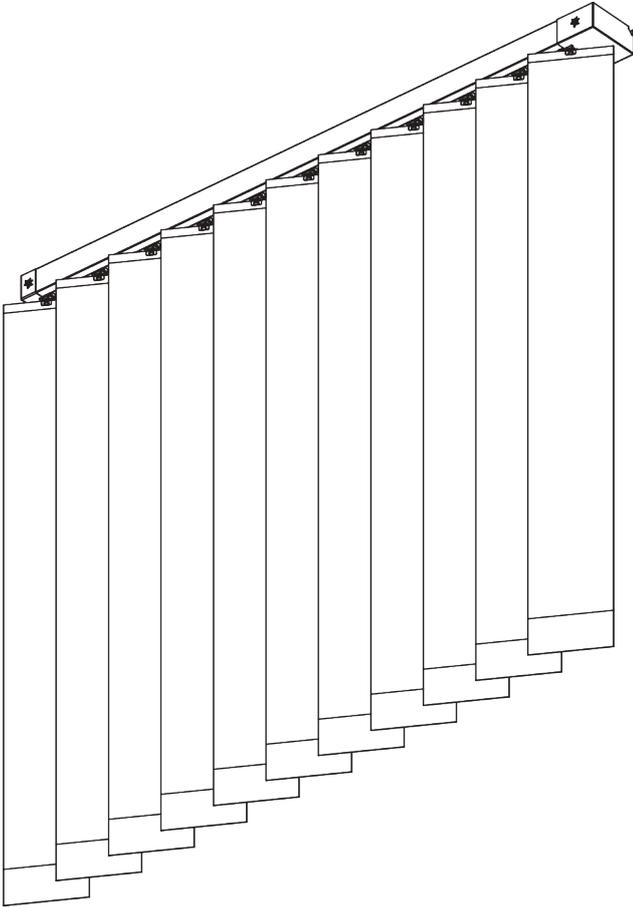


SG 2960



PRODUCT INFORMATION


- **Operation:** motorised
- **Range:** S - L
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016, black RAL 9005, anodised aluminum; special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- Optimised light control
- Various control options
- Louvre width: 127 mm
- Vertical Waves

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



5 m



Single stack: 90 cm
Pair stack: 1.2 m



4 m



320 g per louvre


Stack sizes

mm	mm	← max. →								
		100	150	200	250	300	350	400	450	500
127 mm		28	35	42	49	56	63	70	77	84
		21	25	28	32	35	39	42	46	49


(cm)

B. PROFILE

Profile information




SG 11860
Profile




SG 11865
Recess profile

C. HOW TO MEASURE

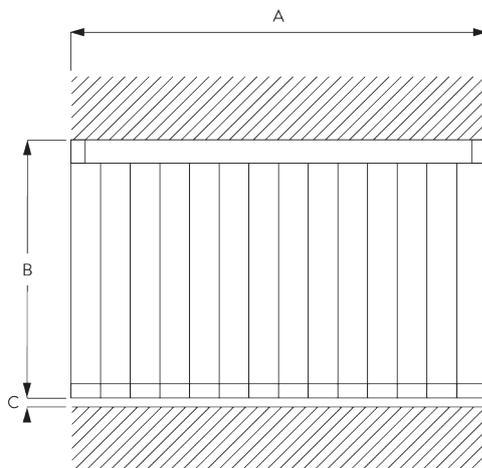

A: System width
B: System height
C: Distance between floor and fabric

Light gap




FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the Silent Gliss website.

Fixing points

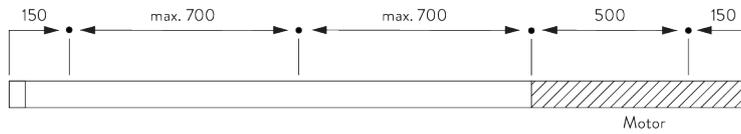


B. CEILING FITTING


Clamp SG 3033 / SG 3044

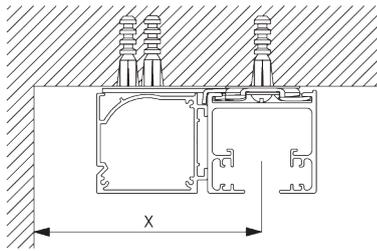

Min. wall distance louvres	X mm
127 mm	85
Vertical Waves 125 mm	140




SG 3033
Clamp



SG 3044
Clamp


C. WALL FITTING

Smart Fix

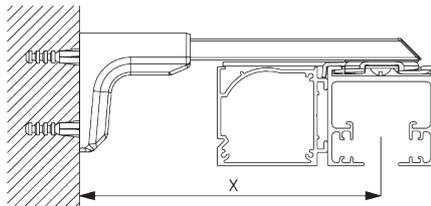


Universal Smart Fix SG 11155 - SG 11156 and clamp SG 3044:
Screw SG 11158 (M4x12) needed.


Smart Fix	X mm
SG 11155	132-160
SG 11156	182-210
Vertical Waves	
SG 11155	140-160
SG 11156	182-210



SG 3044
Clamp



SG 11155
Universal Smart Fix 150 mm




SG 11156
Universal Smart Fix 200 mm




SG 11158
Countersunk head screw
M4x12

D. RECESS FITTING


**Recess Profile
SG 11865**

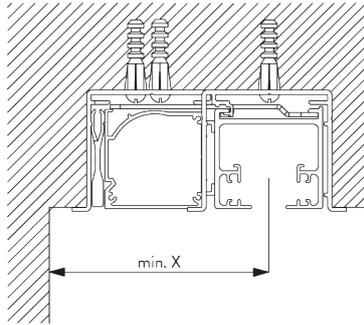


Min. wall distance louvres	X mm
127 mm	85
Vertical Waves 125 mm	140

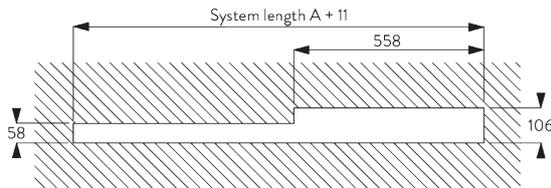


Recess depth: 49 mm




SG 11865
Recess profile




SG 11843
Recess box left




SG 11846
Recess box right



SG 11885
Recess mask




SG 11887
Cover





SG 11795
Wedge


Recess Profile
SG 11865 - suspended ceiling

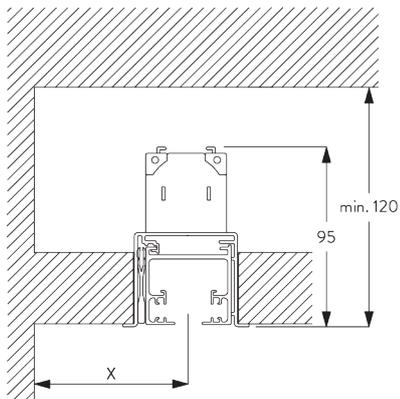


<i>Min. wall distance louveres</i>	<i>X mm</i>
127 mm	85
Vertical Waves 125 mm	140

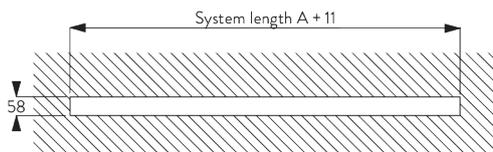

SG 11865
Recess profile




SG 11897
Recess mask





SG 11795
Wedge

SYSTEM OPTIONS


A. VERTICAL WAVES

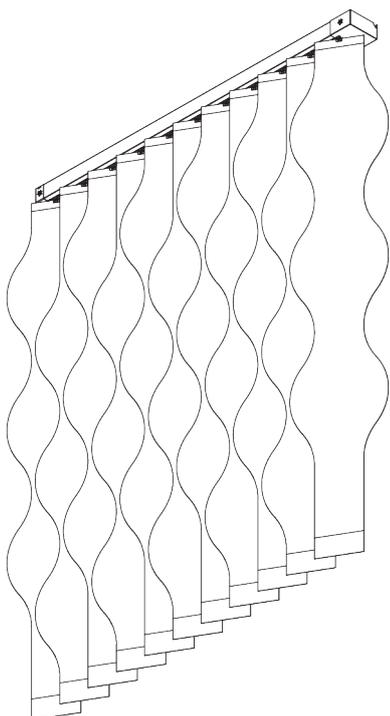

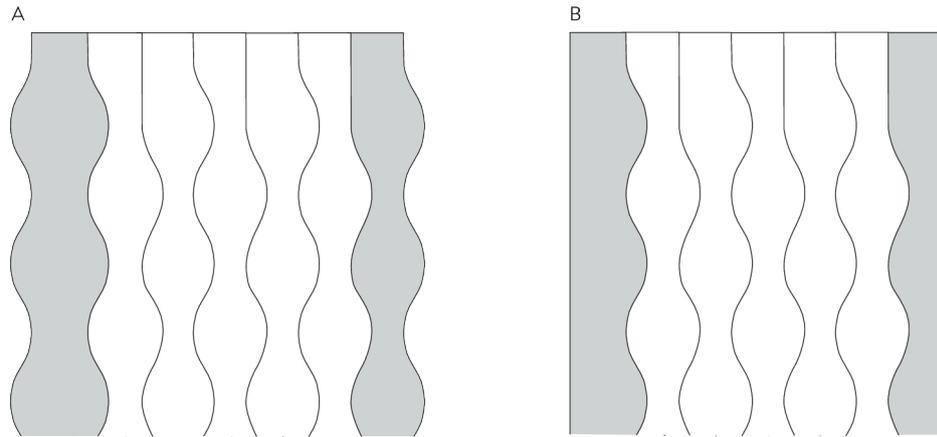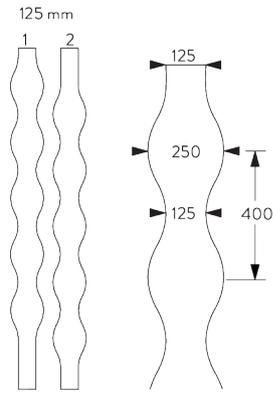

Wall ending
 A: Wavy edge
 B: Straight edge

**B. STACKING
 VARIATIONS**

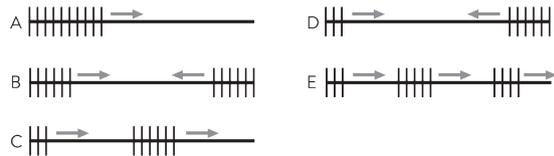

A: Single stack in one direction
 B: Pair stack in two directions symmetrical
 C: Pair stack in one direction asymmetrical
 D: Pair stack in two directions asymmetrical
 E: Multiple stacking in one direction symmetrical or asymmetrical

MOTORS & CONTROLS

A. MOTOR FEATURES

Motors	50-Series	40-Series
	SG 11251 (SG 11892 / SG 11893)	SG 11949 (SG 11890 / SG 11891)
Motor Features		
Soft start	●	●
Precision controlled slat adjustment		●
Electronic end-stop	●	●
Electronic revolution counter (unlimited revolution)	●	●
One intermediate position possible		●
Parallel wiring possible without additional relays		●
Disconnectable motor cable	●	●
IP class	IP 30	IP 30
Control Features		
Dry contact control	●	●
Dry contact and / or SG Control N control		●
SG Control N (built-in receiver)		●
Smart by Silent Gliss	●	
Suitable for most major home automation systems (with suitable interface)		●

B. MOTOR SPECIFICATIONS

Motors	Max. weight	Min. system width	Voltage	Current	Frequency	Speed	Frequency receiver
50-Series (Smart by Silent Gliss)							
SG 11251	320 g per louvre	90 cm	24 V DC	1.5 A	n/a	32 rpm	n/a
40-Series							
SG 11949 (standard)	320 g per louvre	90 cm	24 V DC	1.5 A	n/a	32 rpm	433 MHz

C. OPERATING METHODS


See catalogue "controls" for details.

Wall Switch



System can be operated by fixed wall switch.

SG Control N



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

Smart by Silent Gliss



Open designed two-way communication system which allows to flawlessly integrate products with most major building management systems.










D. WIRING
DIAGRAMS







Refer to Silent Gliss website.








PARTS











A. STANDARD PARTS

	SG 3033 Clamp
	SG 6781 Pan head screw M5x5
	SG 11790 Pilot runner
	SG 11793 Rotation element set 127 mm
	SG 11826 Belt return
	SG 11837 Belt connector
	SG 11838 Belt connector
	SG 11841 Cover
	SG 11842 Bracket
	SG 11844 Driving belt
	SG 11845 Top clip 127 mm
	SG 11847 Bottom weight 127 mm
	SG 11851 Bottom link 127 mm
	SG 11854 End stop

	SG 11856
	SG 11860 Profile
	SG 11862 Motor drive set right
	SG 11871 Lock
	SG 11883 Cover right
	SG 11891 Motor set 24V DC right, Vertical 40-Series S 3/32, radio receiver

B. OPTIONAL PARTS

	SG 2962 Connection bridge
	SG 3044 Clamp
	SG 10275 Locking nut M4 DIN 985
	SG 10277 Pan head screw M4x12
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11260 Gateway Cedia
	SG 11261 Gateway KNX
	SG 11262 Expansion unit
	SG 11263 Power supply 24V DC, 2 Ampere DIN Rail
	SG 11264 Power supply 24V DC, 3.8 Ampere DIN Rail
	SG 11265 Power supply 24V DC, 5 Ampere DIN Rail
	SG 11266 Power supply 24V DC, 10 Ampere DIN Rail
	SG 11794 Rotation element set 100 mm

	SG 11795 Wedge		SG 11895 Motor set 24V DC top mounted, Vertical 40-Series S 3/32 433MHz
	SG 11843 Recess box left		SG 11896 Motor set 24V DC top mounted, 50-Series S3/32
	SG 11846 Recess box right		SG 11897 Recess mask
	SG 11849 Bottom weight 127 mm		SG 11900 Move Server
	SG 11861 Motor drive set left		SG 11931 Radio hand held 1 channel
	SG 11865 Recess profile		SG 11932 Radio hand held 6 channel
	SG 11882 Cover left		SG 11936 Radio wall transmitter 1 channel
	SG 11885 Recess mask		SG 11937 Radio wall transmitter 6 channel
	SG 11887 Cover		SG 11965 Power supply set 24V/2A with EU/ CH plug
	SG 11888 Cover left		
	SG 11889 Cover right		
	SG 11890 Motor set 24V DC left, Vertical 40-Series S 3/32, radio receiver		
	SG 11892 Motor set 24V DC left, 50-Series S 3/32		
	SG 11893 Motor set 24V DC right, 50-Series S 3/32		

